


ORTTECSA

MANUFACTURERS SINCE 1979

MANUFACTURERS SINCE 1979

OPERATION TABLE GYNECOLOGICAL TABLE EXAMINATION COUCHSERIES

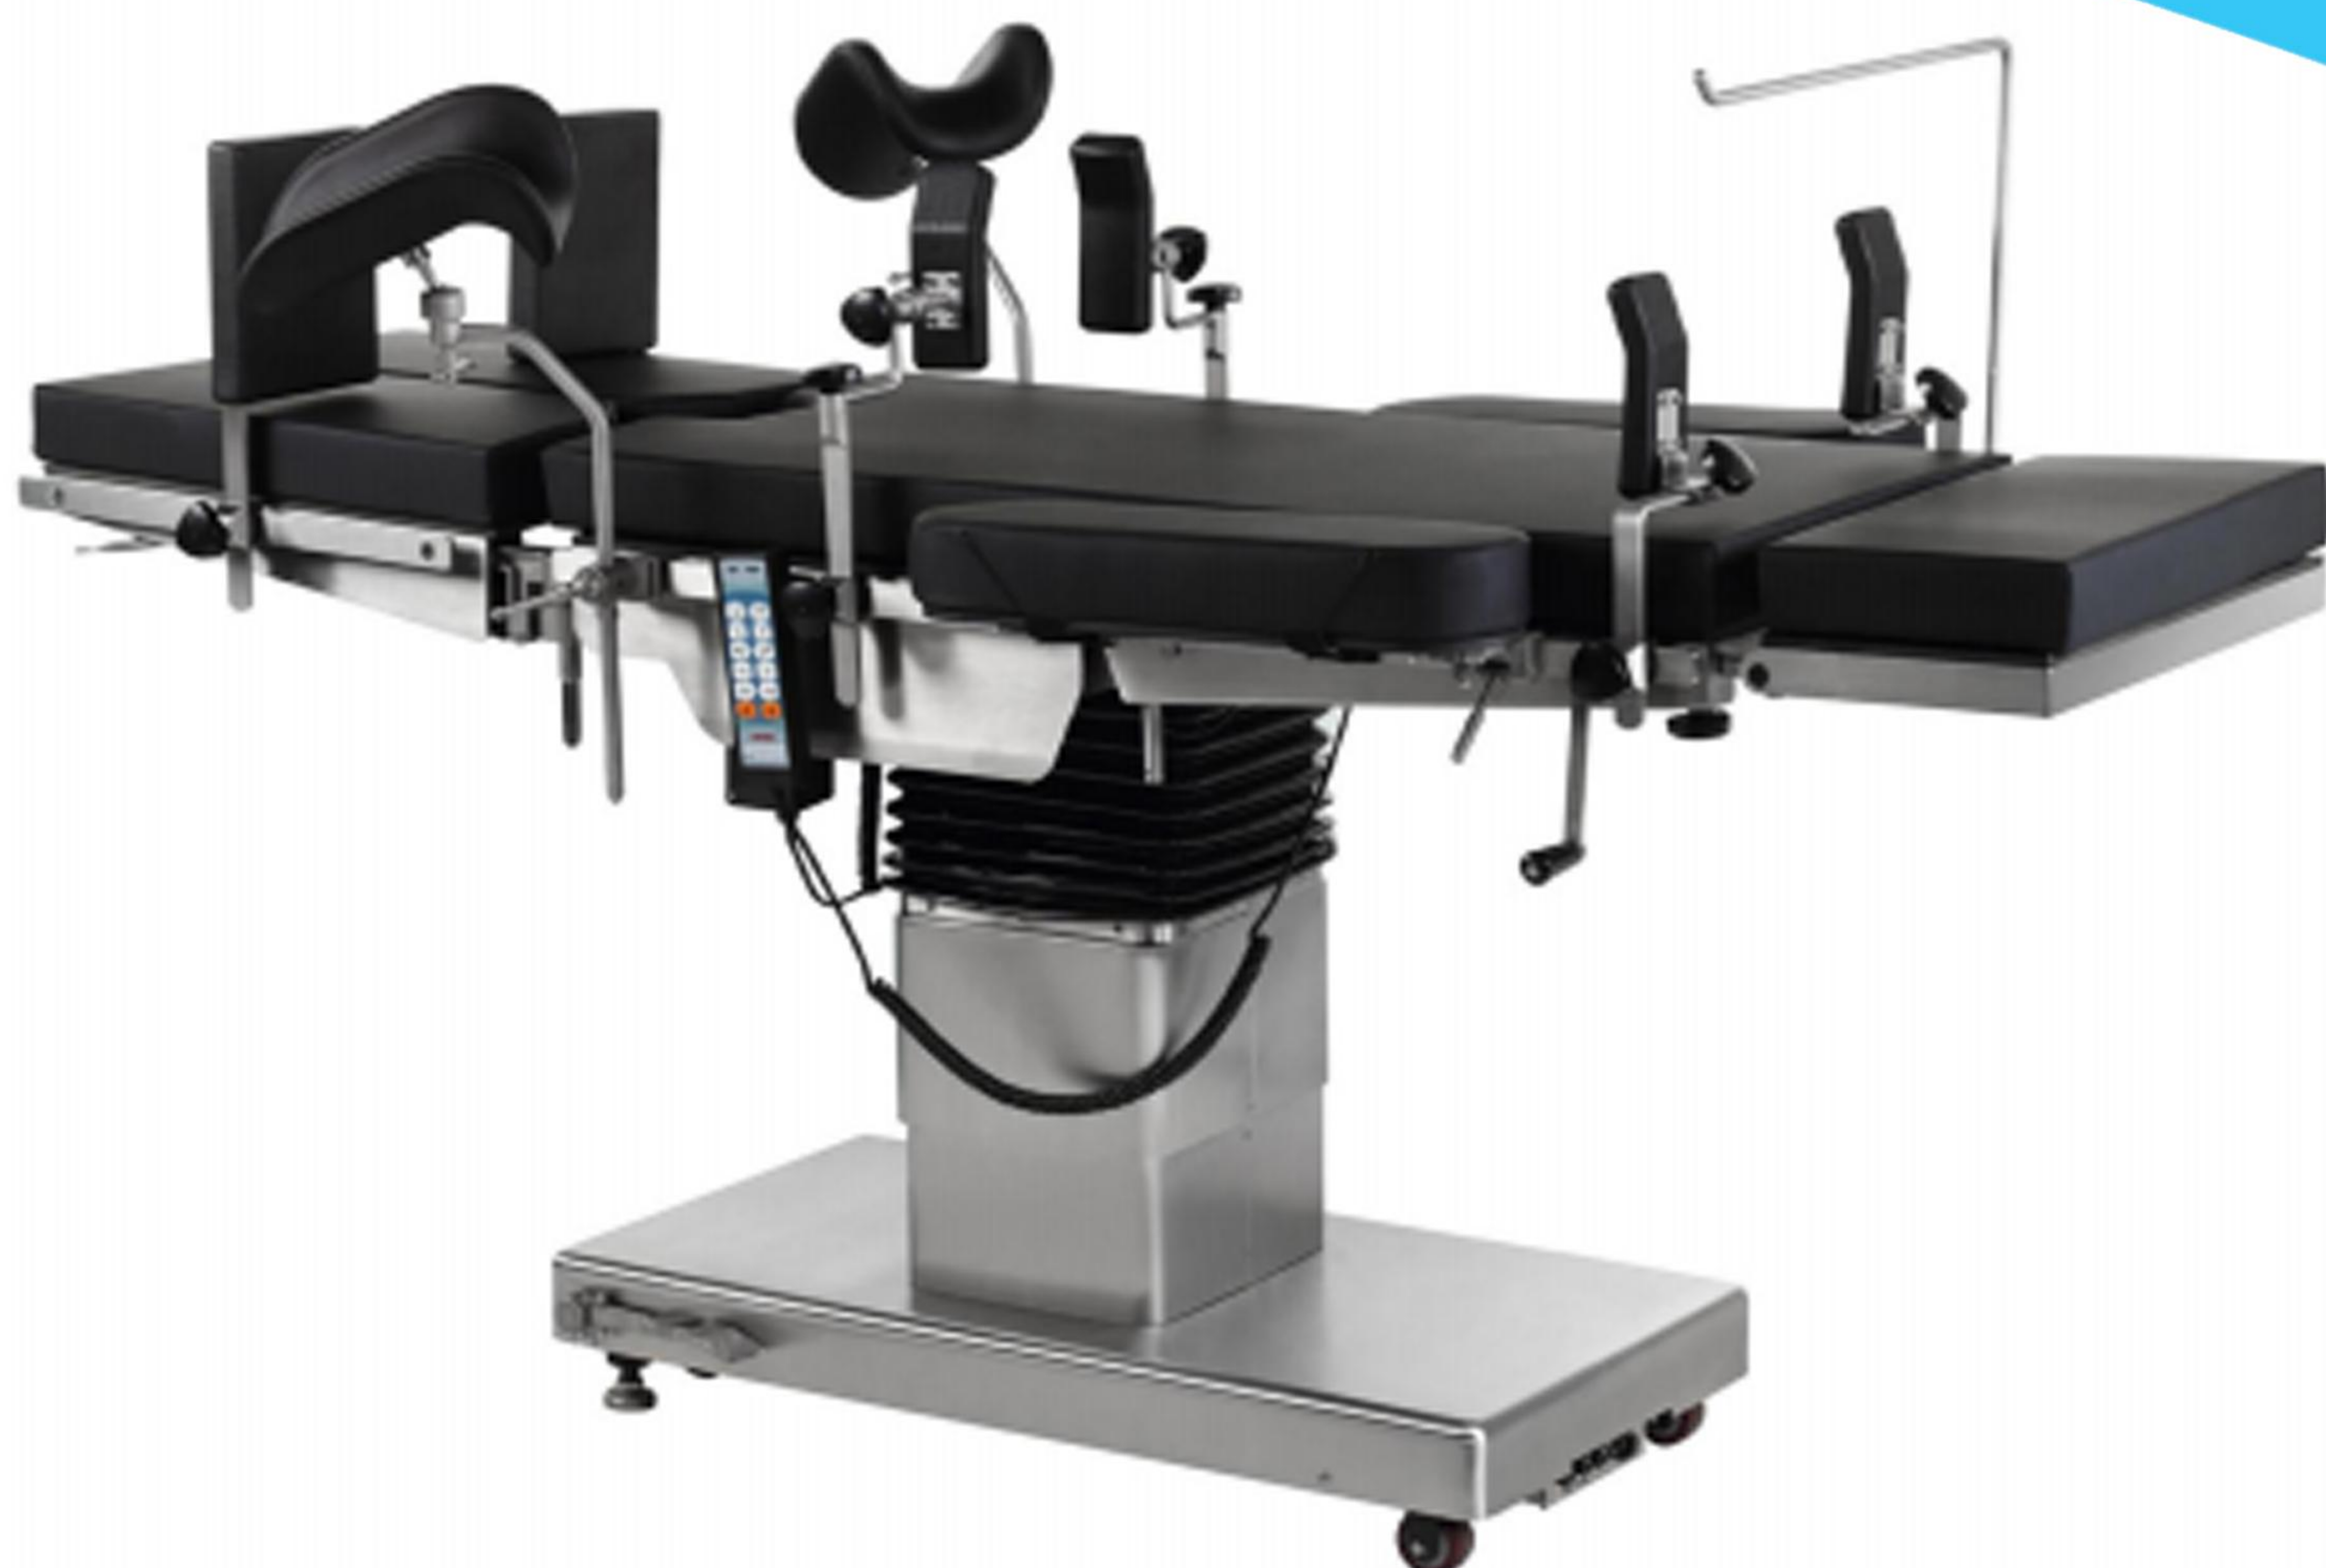

ORT-DTPY07S

Advanced electro-hydraulic operation table



Functions:

1. Tabletop trendelenburg: 0-25°
2. Reverse trendelenburg: 0-25°
3. Lateral Tit(Left And Right): 0-15°
4. Head Plate Up: 0-45°
5. Head Plate Down: 0-90°
6. Back Plate Up: 0-75°
7. Back Plate Down: 0-20°
8. Foot Plate Up: 0-15°
9. Foot Plate Down: 0-90°
10. Foot plate horizontal position: 90°
11. Kidney Bridge Elevation: 110mm
12. Horizontal Sliding: 300mm
13. Voltage: 220V/110V
14. Battery: Yes
15. Mattress: Memory Mattress

Main Features:

- Electric-motor system
- C-arm applicable
- Double table top made by composite laminate for X-ray application
- Separate leg part and detachable
- Seamless foam mattress with PU cover

Technical Parameters:

- External Length : 2070mm
- External Width : 550mm
- Tabletop Height Min : 700mm
- Tabletop Height Max : 1000mm



ORT-DTPY07

Electro-hydraulic Operation Table

Main Features:

1. Electro-hydraulic system
2. Longitudinal slide up to 350mm for free access to C-arm
3. Double table top made by composite laminate for X-ray application
4. Built-in kidney bridge
5. Separate leg part and detachable
6. Seamless foam mattress with PU cover, waterproof

Functions:

1. Tabletop trendelenburg $\geq 30^\circ$
2. Reverse trendelenburg $\geq 30^\circ$
3. Lateral Tit(Left And Right) $\geq 18^\circ$
4. Head Plate Up $\geq 60^\circ$
5. Head Plate Down $\geq 90^\circ$
6. Back Plate Up $\geq 90^\circ$
7. Back Plate Down $\geq 45^\circ$
8. Leg Plate Up $\geq 15^\circ$
9. Leg Plate Down $\geq 90^\circ$
10. Leg Plate Outward $\geq 90^\circ$
11. Horizontal Sliding ≥ 350 mm

Technical Parameters:

- External Length ≥ 1970 mm
- External Width ≥ 500 mm
- Tabletop Height Min ≤ 690 mm
- Tabletop Height Max ≥ 1100 mm
- Elevation Range ≥ 410 mm



ORT-DTPY05

Electric Operation Table

Main Features:

1. Electric-motor system
2. Longitudinal slide up to 350mm for free access to C-arm
3. Double table top made by composite laminate for X-ray application
4. Built-in kidney bridge
5. Two joint head plate
6. Standard override panel control makes the control safer
7. Imported gas spring to control leg plate
8. Separate leg part and detachable
9. Seamless foam mattress with PU cover, waterproof
10. Battery power for 50-80 operations
11. Easily moved to any position by four casters
12. Double electric controller system
13. Extreme weight load capacity of 250 kg

Technical Parameters:

External Length \geq 2100mm
 External Width : 500mm
 Tabletop Height Min \leq 700mm
 Tabletop Height Max \geq 990mm
 Elevation Range : 300mm

Functions:

- | | |
|---|-------------------------------------|
| 1. Tabletop trendelenburg \geq 25° | 7. Back Plate Down \geq 20° |
| 2. Reverse trendelenburg \geq 25° | 8. Leg Plate Up \geq 15° |
| 3. Lateral Tit(Left And Right) \geq 15° | 9. Leg Plate Down \geq 90° |
| 4. Head Plate Up \geq 40° | 10. Leg Plate Outward \geq 90° |
| 5. Head Plate Down \geq 90° | 11. Kidney Bridge Elevation: 110mm |
| 6. Back Plate Up \geq 80° | 12. Horizontal Sliding \geq 350mm |



ORT-DTPY04

Electric Operation Table

Main Features:

1. Electric-motor system
2. Double table top made by composite laminate for X-ray application
3. Separate leg part and detachable
4. Seamless foam mattress with PU cover, waterproof

Functions:

1. Tabletop trendelenburg \geq 15°
2. Reverse trendelenburg \geq 15°
3. Lateral Tit(Left And Right) \geq 15°
4. Head Plate Up \geq 40°
5. Head Plate Down \geq 90°
6. Back Plate Up \geq 60°
7. Back Plate Down \geq 30°
8. Leg Plate Up \geq 15°
9. Leg Plate Down \geq 90°
10. Leg Plate Outward \geq 180°
11. Kidney Bridge Elevation \geq 110mm

Technical Parameters:

External Length \geq 2000mm
 External Width \geq 520mm
 Tabletop Height Min \leq 750mm
 Tabletop Height Max \geq 1100mm



ORT-DTPY07

Electro-Hydraulic Operation Table



Main Features:

1. Electro-hydraulic system
2. Longitudinal slide up to 350mm for free access to C-arm
3. Double table top made by composite laminate for X-ray application
4. Built-in kidney bridge
5. Two joint head plate
6. Standard override panel control makes the control safer
7. Imported gas spring to control leg plate
8. Separate leg part and detachable
9. Plug-in leg plate control by electro-hydraulic and manual
10. Seamless foam mattress with PU cover, waterproof
11. Battery power for 50-80 operations
12. One button reposition function
13. Double electric controller system
14. Extreme weight load capacity of 300 kg

Technical Parameters:

- External Length $\geq 2170\text{mm}$
- External Width $\geq 500\text{mm}$
- Tabletop Height Min $\leq 690\text{mm}$
- Tabletop Height Max $\geq 1100\text{mm}$
- Elevation Range $\geq 410\text{mm}$

Functions:

1. Tabletop trendelenburg $\geq 30^\circ$
2. Reverse trendelenburg $\geq 30^\circ$
3. Lateral Tit (Left And Right) $\geq 20^\circ$
4. Head Plate Up $\geq 40^\circ$
5. Head Plate Down $\geq 90^\circ$
6. Back Plate Up $\geq 85^\circ$



7. Back Plate Down $\geq 40^\circ$
8. Leg Plate Up $\geq 15^\circ$
9. Leg Plate Down $\geq 90^\circ$
10. Leg Plate Outward $\geq 90^\circ$
11. Kidney Bridge Elevation: 110mm
12. Horizontal Sliding $\geq 350\text{mm}$

ORT-DTPY-E3

Electric Ophthalmological Operation Table

Main Features:

1. Electric-motor system
2. Foot switch: several groups of different functions is convenient for operation by doctor.
3. Back plate and leg plate adopted the foot switch
4. Head plate is easy to control by mechanical gear
5. Seamless foam mattress with PU cover, waterproof

Functions:

1. Head Plate Up $\geq 45^\circ$
2. Head Plate Down $\geq 90^\circ$
3. Back Plate Up $\geq 45^\circ$
4. Back Plate Down $\geq 20^\circ$
5. Leg Plate Up $\geq 30^\circ$
6. Leg Plate Down $\geq 30^\circ$

Technical Parameters:

- External Length $\geq 2080\text{mm}$
- External Width $\geq 550\text{mm}$
- Tabletop Height Min $\leq 500\text{mm}$
- Tabletop Height Max $\geq 700\text{mm}$
- Elevation Range $\geq 200\text{mm}$



ORT-STY06

Manual Hydraulic Operation Table

Main Features:

hydraulic pump system
X-ray applicable
Double table top
Separate leg part and detachable
Seamless foam mattress with PU cover

Technical Parameters:

External Length: 2050±50mm
External Width: 480±20mm
Tabletop Height Min: 750mm
Tabletop Height Max: 950mm

Functions:

1. Tabletop trendelenburg: $\geq 20^\circ$
2. Reverse trendelenburg: $\geq 20^\circ$
3. Lateral Tit (Left And Right): $\geq 20^\circ$
4. Head Plate Up: $\geq 30^\circ$
5. Head Plate Down: $\geq 90^\circ$
6. Back Plate Up: $\geq 75^\circ$
7. Back Plate Down: $\geq 5^\circ$
8. Leg Plate Down: $\geq 90^\circ$
9. Leg Plate Outward: $\geq 180^\circ$
10. Kidney Bridge Elevation: 100±20mm



ORT-STY03

Manual Hydraulic Operation Table

Main Features:

hydraulic pump system
Seamless foam mattress with PU cover

Functions:

1. Tabletop trendelenburg: $\geq 25^\circ$
2. Reverse trendelenburg: $\geq 25^\circ$
3. Lateral Tit (Left And Right): $\geq 20^\circ$
4. Head Plate Up: $\geq 60^\circ$
5. Head Plate Down: $\geq 90^\circ$
6. Back Plate Up: $\geq 80^\circ$
7. Back Plate Down: $\geq 10^\circ$
8. Leg Plate Up: $\geq 15^\circ$
9. Leg Plate Down: $\geq 90^\circ$
10. Leg Plate Outward: $\geq 90^\circ$
11. Kidney Bridge Elevation: 100±20mm

Technical Parameters:

External Length ≥ 1940 mm
External Width ≥ 480 mm
Tabletop Height Min ≤ 770 mm
Tabletop Height Max ≥ 1020 mm
Elevation Range ≥ 250 mm



ORT-STY07

Manual Hydraulic Operation Table

Main Features:

hydraulic pump system
X-ray applicable
Double table top made by composite laminate for X-ray
Separate leg part and detachable
Seamless foam mattress with PU cover

Technical Parameters:

External Length $\geq 2100\text{mm}$
External Width $\geq 500\text{mm}$
Tabletop Height Min $\leq 760\text{mm}$
Tabletop Height Max $\geq 1010\text{mm}$

Functions:

1. Tabletop trendelenburg: $\geq 22^\circ$
2. Reverse trendelenburg: $\geq 22^\circ$
3. Lateral Tit (Left And Right): $\geq 20^\circ$
4. Head Plate Up: $\geq 60^\circ$
5. Head Plate Down: $\geq 70^\circ$
6. Back Plate Up: $\geq 85^\circ$
7. Back Plate Down: $\geq 40^\circ$
8. Leg Plate Up: $\geq 15^\circ$
9. Leg Plate Down: $\geq 85^\circ$
10. Leg Plate Outward: $\geq 90^\circ$
11. Kidney Bridge Elevation: 120mm



ORT-STY04

Manual Hydraulic Operation Table

Main Features:

Hydraulic pump system operated by pedal
Seamless foam mattress with PU cover

Functions:

1. Tabletop trendelenburg: $\geq 24^\circ$
2. Reverse trendelenburg: $\geq 15^\circ$
3. Back Plate Up: $\geq 62^\circ$
4. Back Plate Down: $\geq 15^\circ$

Technical Parameters:

External Length $\geq 1760\text{mm}$
External Width: 600mm
Tabletop Height Min $\leq 680\text{mm}$
Tabletop Height Max $\geq 920\text{mm}$
Elevation Range $\geq 240\text{mm}$



ORT-DCLT03(II)

Electric Gynecological Obstetric Table

Main Features

This model is applicable to obstetric , surgery, gynecological exam and general operation in ob/gyn department.
Electric motor operate various movements by foot controller
The base and column cover made by stainless steel
The covers, filth basin are made from engineering plastic
Mattress made of mould from, stemless PU cover.

Technical Specifications

- External Dimension: L1920*W820mm
- Dimension of table: L1340mm*W610mm
- Table Width : 610mm
- Assist platform dimension:L680mm*W610mm
- Table height adjustment: from 780mm to 1030mm
- Back section Turn: From $-5^{\circ}\pm 2^{\circ}$ to $70^{\circ}\pm 5^{\circ}$
- Seat section turn up: $\geq 15^{\circ}\pm 2^{\circ}$
- Arm rest swing out: $\geq 90^{\circ}$ (can fold up as guard rail)
- Assist platform swing out: $0^{\circ}\sim 90^{\circ}$
- Footrest swing out: $0-45^{\circ}$
- Footrest turn up: $0-45^{\circ}$
- Filth basin dimension :L468*W338*D125mm
(can be equipped with soft pipe)
- Max. Load: ≥ 250 kg



ORT-DCLT06(II)

Electric Gynecological Table

Brief Description

- This model electric gynecology bed is mainly used for clinical examinations, driven by low-voltage DC motor with advanced backup power, safe and reliable.
The bed frame is made of high quality stainless steel or spray painting carbon steel for two different models.
And the mattress is foam molding with good shape and easy to clean
- With 2pcs Leg Support
- With 2pcs Shake hand shandle
- With 1pcs stainless steel basin of dirt
- With 1 pcs foot pedal

Technical Specifications

- Size: 1450* 600*580mm(L*W*H)
- Height adjustable range: 480mm
- Back section adjustable: -20° - 70°
- Hip section adjustable: $0-40^{\circ}$



ORT-SCCR04

Hydraulic Gynecological Table

Technical Specification

- Table top dimension:
length 1895mm, width 610mm
- Min & max table height:
630mm~880mm
- Trendelenburg & reverse trendelenburg
reverse trend $\geq 10^\circ$, trend $\geq 15^\circ$
- Back section turning: $-10 \sim 75^\circ$
- Assist platform dimension
length 550mm, width 610mm
- Arm rest swing out: $\geq 90^\circ$
- Filth basin dimension:
468*338*125mm(can be equipped with soft pipe)



ORT-DCLT03(I)

LDR Bed

Technical Specification

- Bed dimension including bed end and bumper wheel:
Length 2050mm, width 980mm
- Bed dimension:
Length 1815mm, width 880mm
- Bed height:
lowest ≤ 580 mm, height ≥ 950 mm(exclude the cushion)
- Back section turning $\geq 70^\circ$
- Trendelenburg and reverse trendelenburg
reverse trend $\geq 5^\circ$, trend $\geq 12^\circ$
- Leg section telescope: 550mm
- Caster dia: 125mm



ORT-EJQ06

S.S Obstetric Bed

Features

The main and auxiliary tables can be separated and also joined up. The auxiliary table is provided with truckles and braking device.

Various actions of main bed are adjusted by gear and of auxiliary bed are adjusted by ratchet.

With various complete accessories.

The bed body and bed surface both adopt high 304 stainless steel.

A pair of arm resting frame, a pair of shoulder support frame, a screen frame, a pair of leg support, a pair of armrest, a pair of pedal foot board

Specification

- Table Length: 1900mm
- Table Width: 600mm
- Height: 750mm
- Backboard Upwards/Downwards: 15° -50°
- Seat board Upwards/Downwards: 8° -30°
- Leg board Upwards/Downwards: 30° -30°



ORT-FJJ10(II)

Woman Examination Table

Features

- whole mild steel frame
- Cushioned with foam mattress, leather covered, waterproof
- Mounted on four rubber feet
- Back rest adjustable by pole in various degree
- Knee section adjustable by pole in various degree
- Detachable construction

Specification

- Table Length: 1880mm
- Table width: 650mm
- Height: 750mm
- Back board upwards: 0-75°
- Leg board downwards: 0-90°

Spare parts

- Infusion stand - 1 pc
- Leg support - 1 pair
- Armrest - 1 pair
- Arm support - 1 pc
- S.S Basin - 1pc



ORT-C003

Electric Examination Couch

Specification

- Size: L2000*W600*H450-950mm
- Headrest max upward angle: 45°
- Table height is adjustable: 450-950mm
- Armrests are adjustable in height 0-300 mm
- Thickness of mattress: 40cm

Main Features

- High grade mild steel frame
- Four castors, two with brakes
- Steel rail along the length of bed on both sides for hinged accessories
- 2 pieces arm supports
- Hand remote control



ORT-C002

Electric Examination Couch

Specification

- Size: L1920*W740*H380-720mm
- Thickness of mattress: 80mm
- Caster diameter: 125mm

Main Features

- High grade mild steel frame
- Cushioned with foam mattress, leather covered, waterproof
- Electric height adjustable
- Hand free pedal control
- Four casters, two with brake



ORT-C006

Hydraulic Examination Couch

Main Features

- High grade mild steel frame
- Cushioned with foam mattress, leather covered, waterproof
- Height adjustable in a hydraulic way
- Pedal control on both sides

Specification

- Size: L1850*W520*H460-760mm
- Thickness of mattress: 80mm



ORT-C008

Examination Couch

Main Features

- High grade mild steel frame
- Cushioned with foam mattress, covered with leather, waterproof
- Backrest adjustable in ratchet mechanism
- Two drawers

Specification

- Size: L1900*W620*H835mm
- Thickness of mattress: 90mm
- Drawers size: 370*375mm
- Backboard adjustable: 0° -70°



ORT-C007

Examination Couch

Main Features

- High grade mild steel frame
- Cushioned with foam mattress, covered with leather, waterproof
- Backrest adjustable by pole in various angle
- Paper roller holder

Specification

- Size: L1830*W560*H800mm
- Thickness of mattress: 70mm
- Backboard adjustable: 0° -70°





ORTOTECSA

ORTOTECSA,S.L.

C/.Peña de Francia,8 (28500) Arganda del Rey
MADRID (España)

Web: www.ortotecsa.com

E-mail: info@ortotecsa.com